

DIMENSIONS ARE IN INCHES

Size	3	4	6	8	10	12	16
A	10 1/8	10 1/8	12 3/16	15	17 5/8	20 3/16	26
B	15/16	15/16	1 1/16	1 1/4	1 5/16	1 3/8	1 1/4
C	13 3/4	13 3/4	15 5/16	18 17/32	21 5/16	23 3/4	28 13/16
D	3/4	3/4	7/8	7/8	1	1	1 1/8
E	4	6	6	8	8	10	14
F	6	7 1/2	9 1/2	11 3/4	14 1/4	17	21 1/4
G	8	8	19	22	26	32	33
H	3/8	3/8	7/16	9/16	5/8	5/8	1/2
J	1 13/32	1 13/32	3 3/16	4 13/32	5 11/32	6 1/2	8 1/4

Item	Description	QTY.	MAT'L
1	Frame	1	316SS
2	Yoke	1	316SS
3	HHCS	4	316SS
4	Plug	1	316SS
5	Resilient Seat	1	*BUNA-N
6	Stem	1	316SS
7	Stem Cap	1	316SS
8	HHCS	2	316SS

* 6" and up, 3" and 4" are assembled with EPDM seats

Notes:

- Bubble tight resilient-to-stainless steel seating
- Open left
- Valve Flange must be level for proper operation
- 125# ANSI flange
 - Only the number of holes specified in the chart are used
- NSF/ANSI/CAN 61 & 372 Certified

Ø F - Bolt Circle Diameter

D - Hole Diameter
E - Number of Holes Used

OPERATOR


- 2" OP. NUT
- SLEEVE COUPLING FOR EXTENSION STEM

G - Number of turns to open

J - Travel Distance

B - Floor level for complete drainage

DOMESTIC

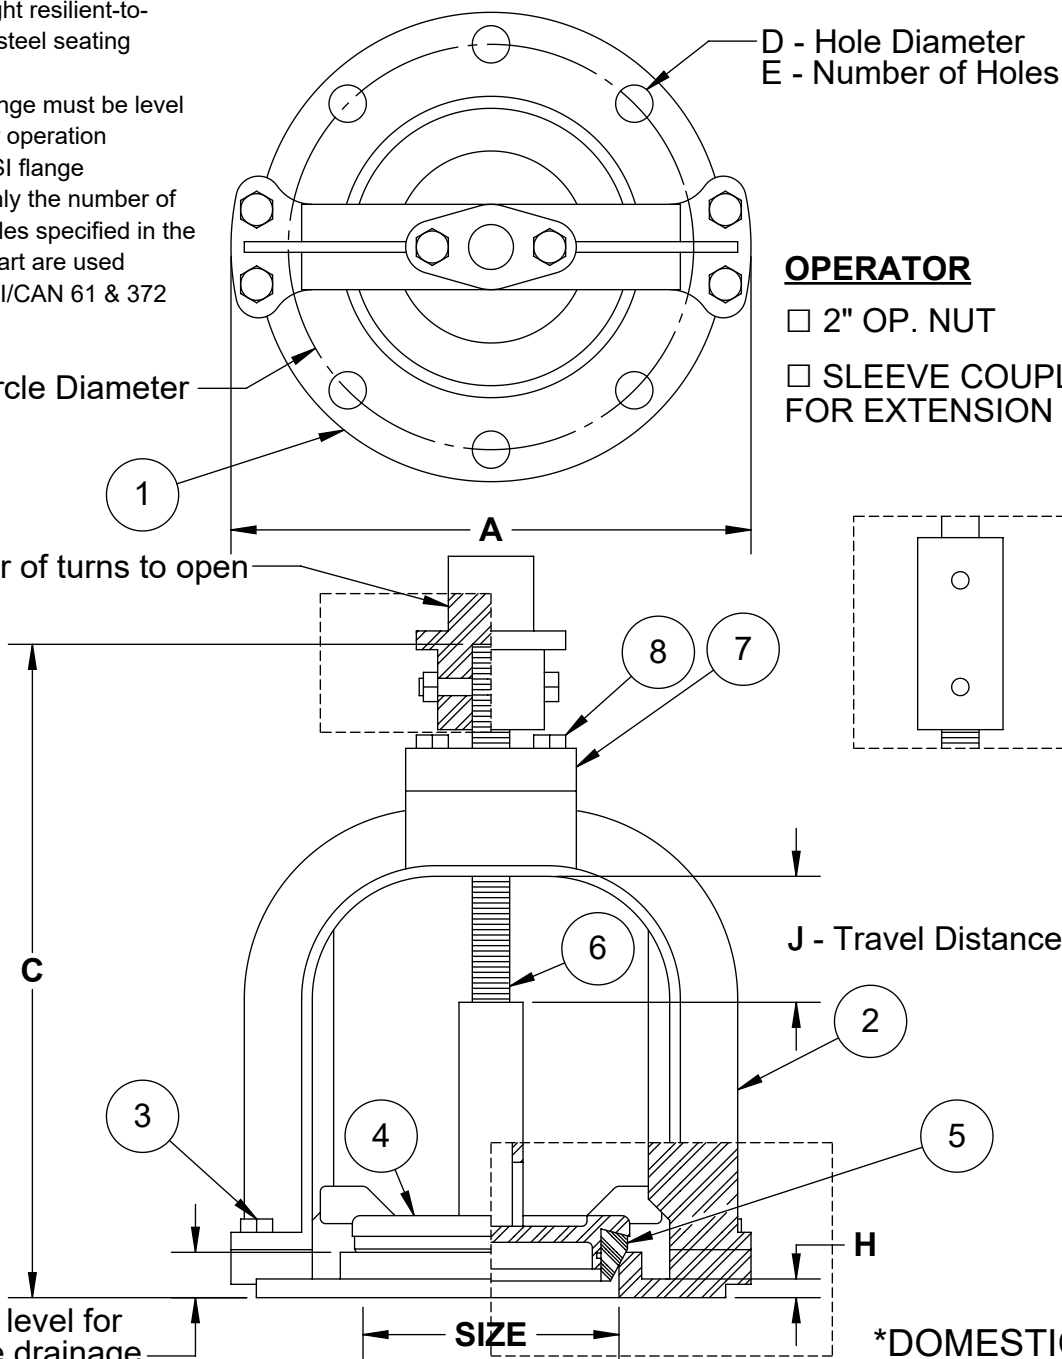

www.TroyValve.com

PHONE: 1-570-297-2125

1A1- DO NOT SCALE DRAWING

TITLE:

SS Mud Valve - Non-Rising Stem 3-16"

MAT'L: SS

DATE: 8/13/2020

PART NO:

USA25600RCSSA

DWN.

TE

PAGE: